

ITC Professional Digital Conference System

1. System Introduction

1.1. System Technical Standards and Qualifications

1. CCC
2. CE

1.2. System Design Principles

1. High Germany Technology
2. Simple Operation and Easy Understandable English Display
3. Easy Maintainance and Uploading
4. Cost Control and Economy Choice

2. System Function

ITC professional digital conference system is one of the worldwide leading conference systems with simple networks system process and digital signal transmission. It integrated several langues transmission, voting & distribution system into one cable with the control line, so as to make sure the high sound performance and precise and safe data transmission.

2.1. Discussion Unit

Tabletop Chairman and Delegate Discussion Units with high sensivity to ensure the high and clear sound long distance transmission even in extrem environment. The unit with red round indicator to light on and flash when power on. The built-in speaker will be opened after 3 minutes to mute resonance.

2.2. Simultaneous Interpretation and IR Transmission

Two channel system to ensure the channel in (listening) and channel out (speaking) diversified multi-languages interpretation function. The spokeman and delegate can communicate easily of different langues with the help of interpreter unit. IR transmission system is innovatively designed apply to high class big conference with many sitter-ins presented, so the long and clear sound transmission of this sytem is another preference.

3. System Solutions

Discusson+Simultaneous Interpretation+IR Transmission System Features

- Dicussion function will be easily available push on the units to light on the red indicator.
- Delegate can discuss at the same time of 1, 2, 4 and 6 units settted by the controller.
- The standard configuration is of 128 unts, expandable to 4096 Units with Extension Controller.
- Built-in high quality speaker driver.
- Audio input & output & MIC input, out amplification and recording equipment connector.
- 5 Langues interpretation & original langues totally 6 transmission.
- Delegate and IR receiver can select channel in (listening) and channel out (speaking).
- IR Trnssion system will let more attendants enjoy the high quality conference.
- Remote telephone conference system will available with Telephone Interface.

4. System Configuration

1. TS-0604M Master Controller
2. TS-0614 Chairman Unit with Cover
3. TS-0614A Delegate Unit with Cover
4. TS-0619 Interpreter Unit with Cover
5. TS-0600G IR Generator
6. TS-0600GT IR Panel
7. TS-0633 IR Receiver
8. TS-0640DS Battery Charger
9. TS-20L Extention Cable with Connector
10. TS-920 Headset Earphone
11. TS-930 Headset Earphone


Complementarity:

1. TS-0604M One Unit (Capacity of 128 units)
2. Item 1 of one unit, item 3 of delegate' s number, item 4 and 10 of interpreter' s number and item 7 and 11 of attendant number
3. TS-0600GT One Unit
4. TS-0640DS Depend on the quantity of MIC unit
5. TS-20L Depend on the size of the conference room



TH Series-Digital Conference System


Discussion System + Sound Reinforcement Diagram

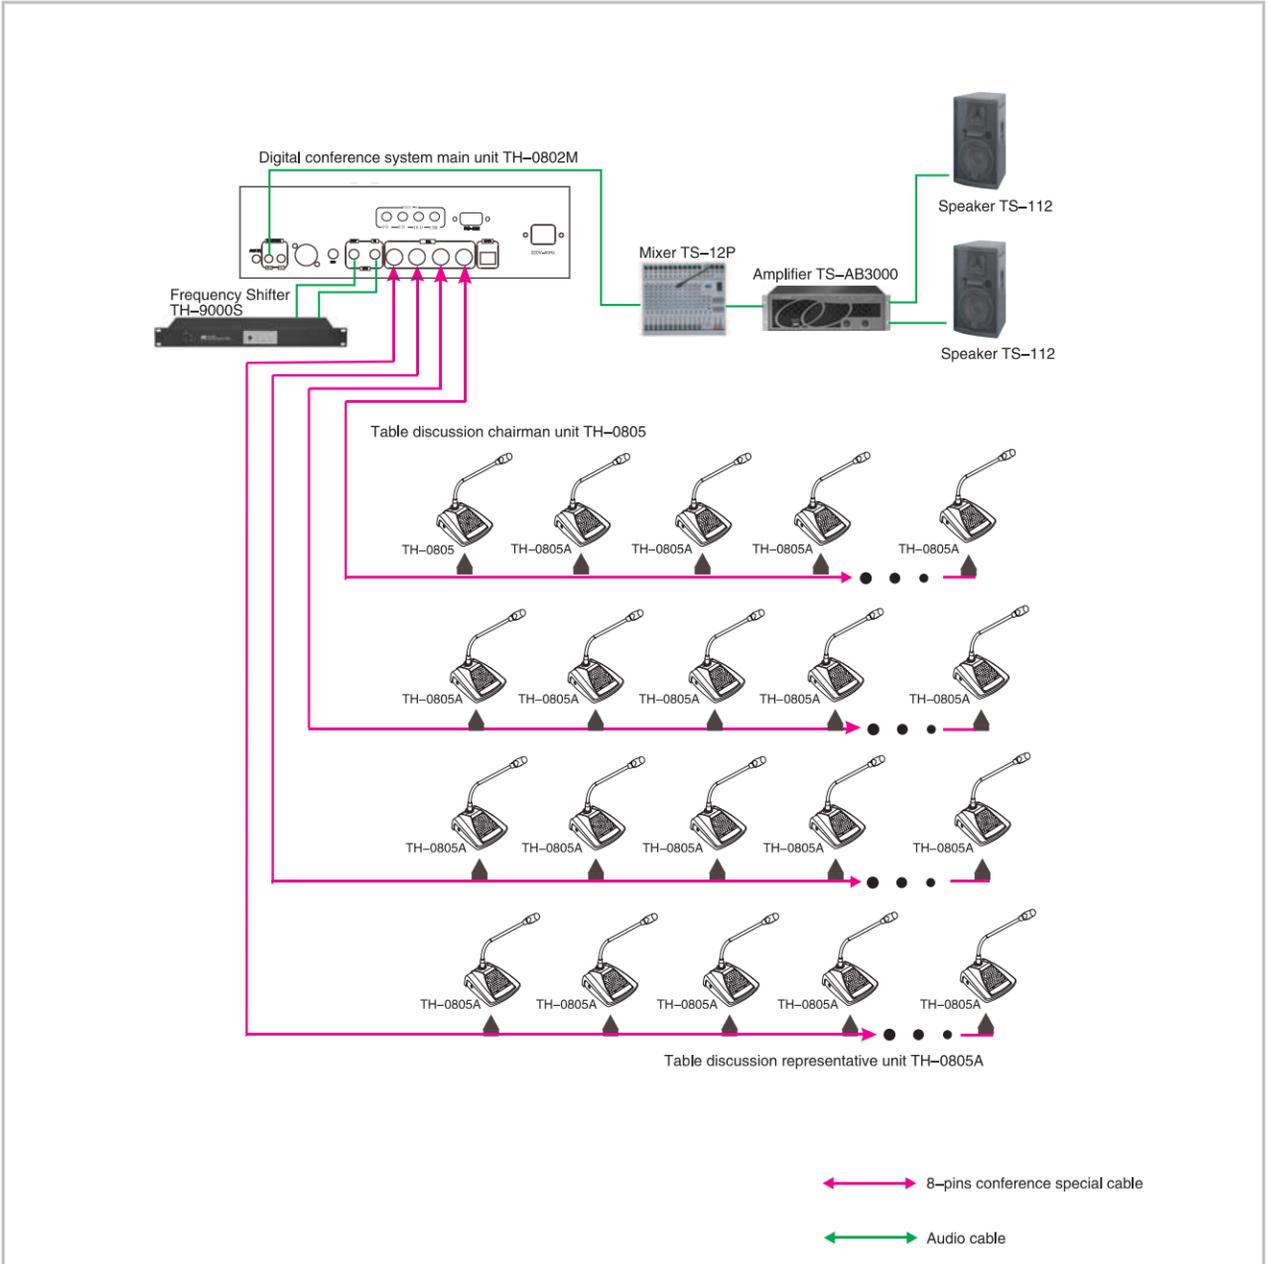

● Features

- Standard conference discussion functions; press "MIC" button to open / close the speech unit.
- Main unit sets microphone turn-on quantity and mode to control conference order.
- The chairman unit has the priority to control the speech.
- Volume adjustment.
- Sound reinforcement.


Discussion + Camera Tracking + Sound Reinforcement Diagram

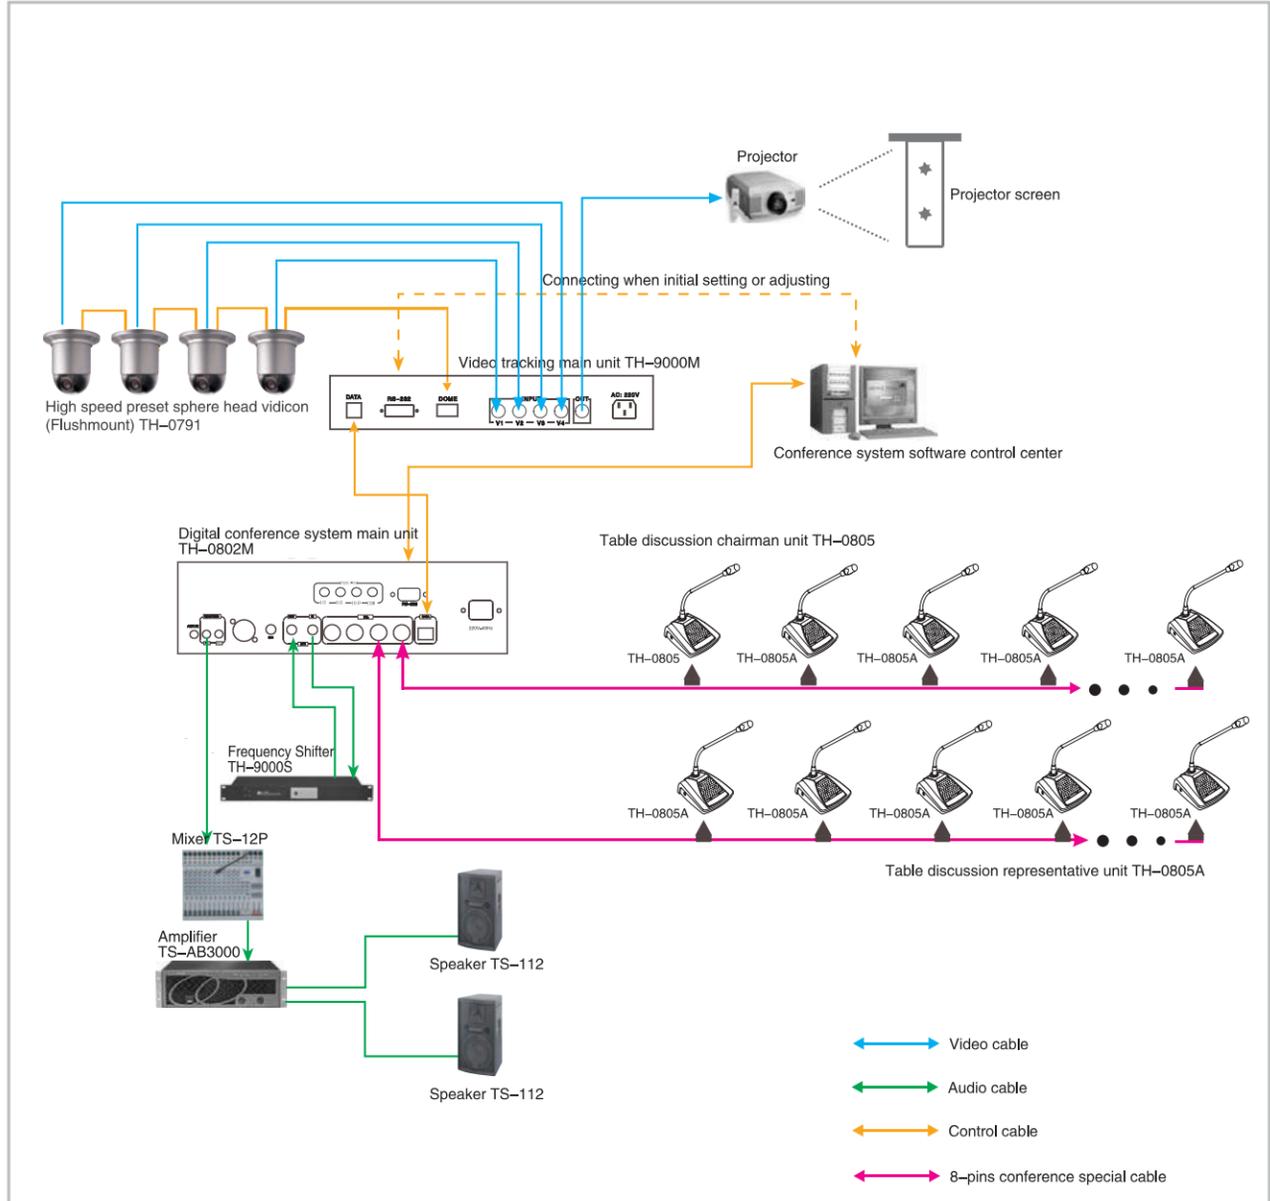

● Features

- Standard conference discussion functions; press "MIC" button to open / close the speech unit.
- Main unit sets microphone turn-on quantity and mode to control conference order.
- The chairman unit has the priority to control the speech.
- Volume adjustment.
- Sound reinforcement.
- Work with the camera tracking master controller to achieve video tracking.


Discussion + Multi-functional Voting + Signing In + Camera Tracking + Sound Reinforcement Diagram

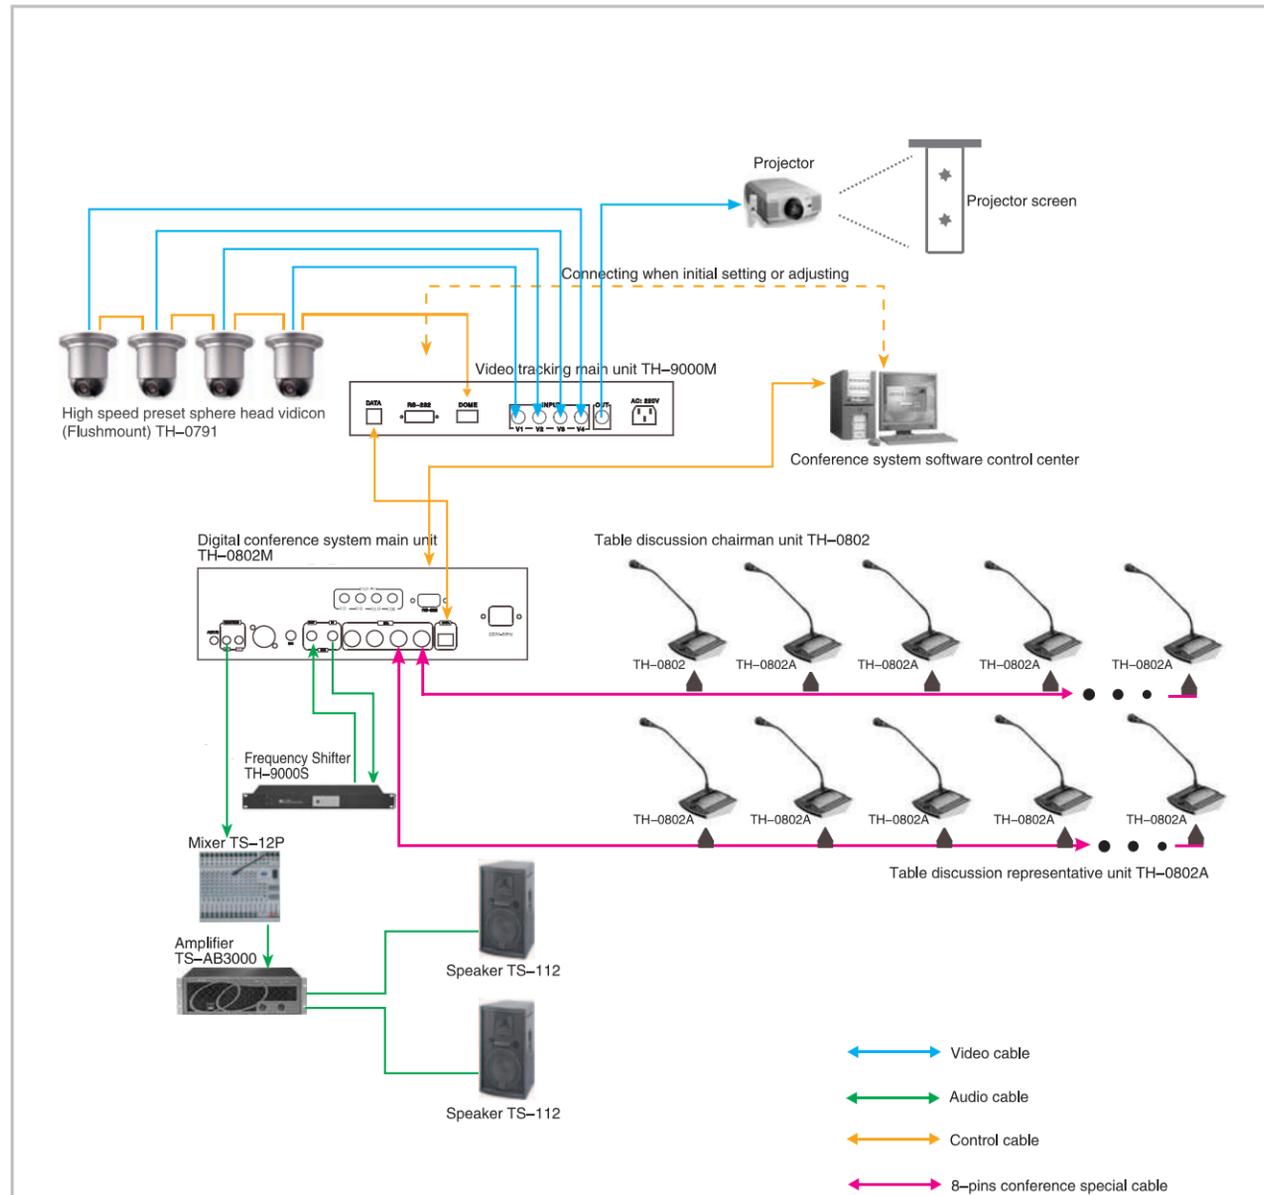

Features

- Standard conference discussion functions; press "MIC" button to open / close the speech unit.
- Main unit sets microphone turn-on quantity and mode to control conference order.
- The chairman unit has the priority to control the speech.
- Volume adjustment.
- With voting, discussion, and attendance functions.
- Sound reinforcement.
- Work with the camera tracking master controller to achieve video tracking.

Discussion + multi-functional voting + signing in + camera tracking + simultaneous interpretation + sound reinforcement diagram

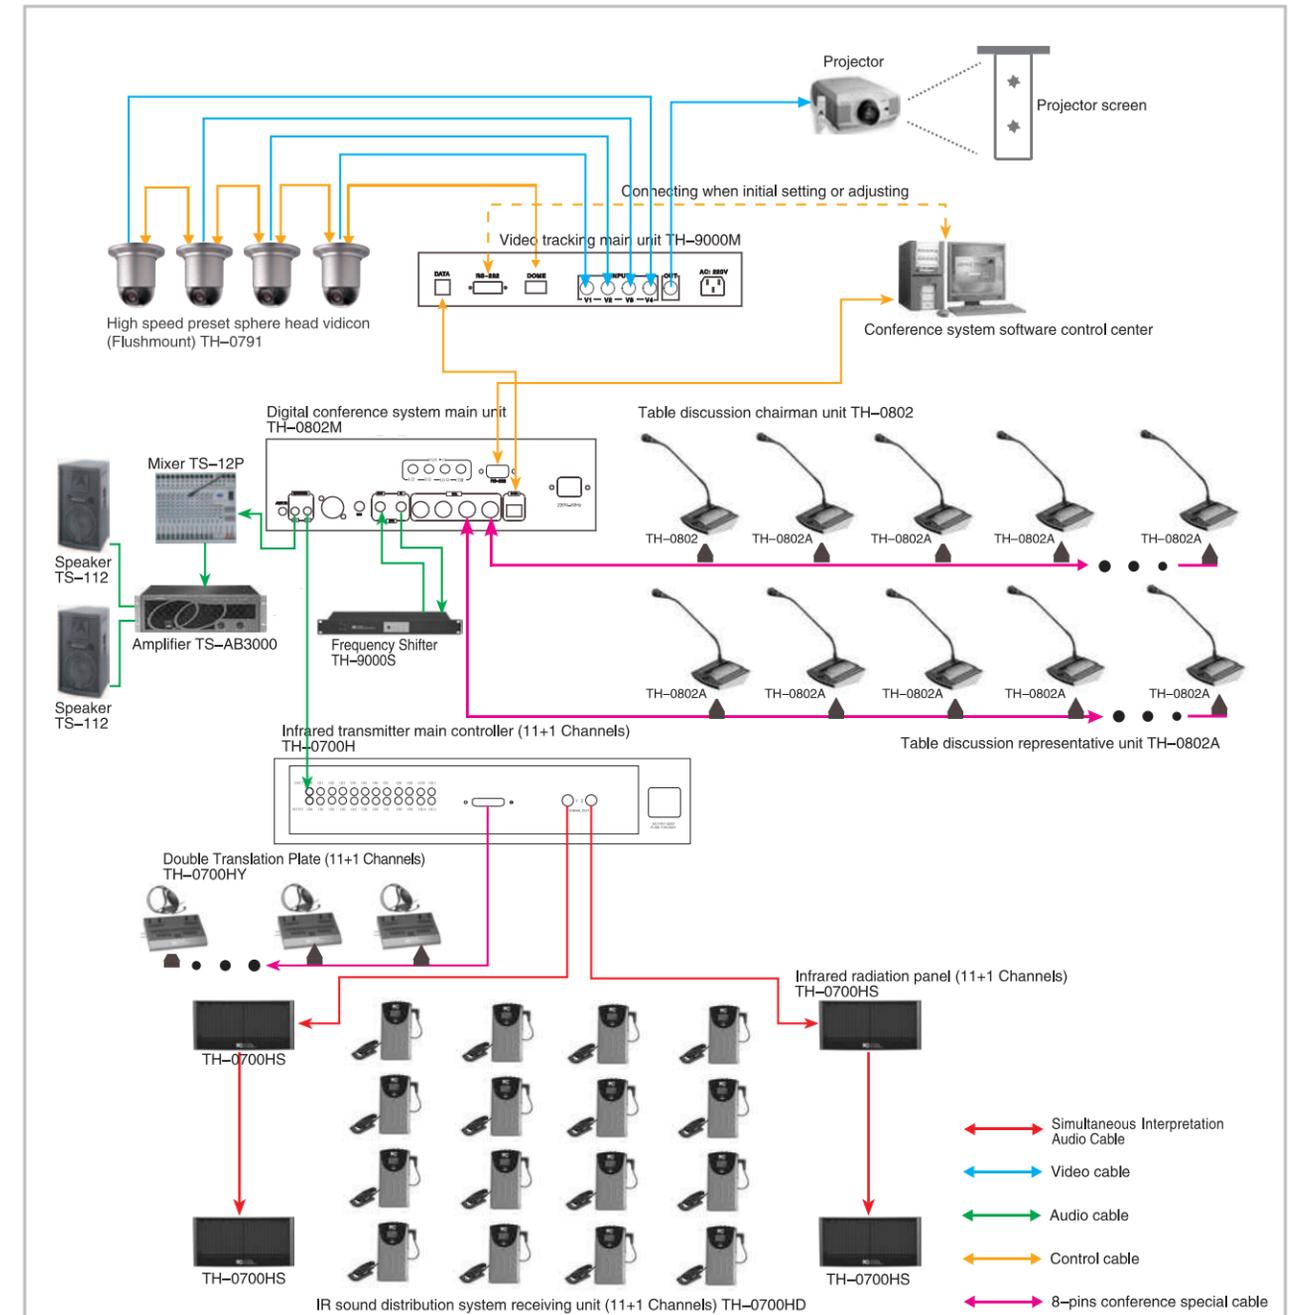

Features

- Standard conference discussion functions; press "MIC" button to open / close the speech unit.
- Main unit sets microphone turn-on quantity and mode to control conference order.
- The chairman unit has the priority to control the speech.
- Volume adjustment.
- Sound reinforcement.
- Work with the camera tracking master controller to achieve video tracking.
- With voting, discussion, and attendance functions.
- Work with Infrared voice distribution system to achieve simultaneous interpretation function; Multi-languages conference can be held; the standard master controller can connect 11 interpretation units to achieve 12 languages simultaneous interpretation (including the original sound).

TH-0802M
Discussion, Voting Main Controller



Features

The high performance compressive master controller is designed especially for conference discussion and voting. It meets all the requirements of modern conference that can manage discussion, decision, voting and commenting according system. It is highly integrated and easy to install.

- The master controller operates by connecting to the computer; Can connect 64 delegates airman units; with master extension the communication capacity reaches 250 sets.
- Achieve functions of conference discussion, multi-voting, with camera tracking host to realize automatically camera tracking.
- Main unit sets microphone turn-on quantity and mode to control conference order.
- Voice transferred by built-in hi-fi speaker and external earphone jack.
- Audio input and output interfaces can connect sound reinforcement equipments and recording equipments. Built 2 × 50W power.

TH-0802ME
Digital Conference System Extension Controller



Features

In a large-scale meeting, if more than 64 attendance units are used, the main controller will not be able to drive all of them to work because of the limited power, thus, it is necessary to use an extension controller.

Functions:

- Power: 450W.
- ~ 220V-230V/50Hz-60Hz AC.
- A six-8P-DIN socket for multiple links, and two expansion controller interface; Can be placed on the table or mounted in standard a 19-inch cabinet.

TH-0801/TH-0804/TH-0805
Discussion Video Chairman Unit

TH-0801A/ TH-0804A/TH-0805A
Discussion Video Delegate Unit



Features

TH-0801/TH-0804/TH-0805

- Latest digital design
- With microphone, speaking button and indicator lamp that can show and control the state of speech.
- Single projection; With Anti-gas sonic boom and wind shield.
- With president priority key; the system sound can be prompted to attract attendances' attention; can be set to terminate for permanent or suspend microphone status of all the speakers.
- The chairman unit can be placed in any position in loop.
- The chairman unit is unrestricted by the limiting function.
- With under-wound capacitive microphone pole and speak halo instructions.
- High sensitivity microphone.
- The power for the delegate units is supplied by the master controller at 24 safe voltage.
- T-shaped 8-core line for unit connection.
- Two groups of 3.5mm stereo sound output socket; can be used as record and earphone connection.
- Built-in hi-fi speaker; volume control.
- With automatic video-tracking function.
- With a microphone unit connecting cable.
- In accordance with International Electrical Equipment Certification standards (IEC 60914) and the International Safety Standard UL or CE certification.

TH-0801A/ TH-0804A/TH-0805A

- Latest digital design.
- With microphone, speaking button and indicator lamp that can show and control the state of speech.
- Single projection; With Anti-gas sonic boom and wind shield.
- With under-wound capacitive microphone pole and speak halo instructions.
- High sensitivity microphone.
- The system power supply for all the delegate unites is provided by the main frame at 24 safe voltage.
- T-shaped 8-core line for unit connection.
- Two groups of 3.5mm stereo sound output socket; can be used as record and earphone connection.
- Built-in hi-fi speaker; volume control.
- With automatic video-tracking function.
- With a microphone unit connecting cable.
- In accordance with International Electrical Equipment Certification standards (IEC 60914) and the International Safety Standard UL or CE certification.

Specifications

Model	TH-0801/TH-0801A	TH-0804/TH-0804A	TH-0805/TH-0805A
Frequency Response	100-13KHz	100-13KHz	100-13KHz
Sensitivity	-44dB ± 2dB	-44dB ± 2dB	-44dB ± 2dB
Reference sound-receiving distance	20-120cm	20-120cm	20-120cm
Tube length	420mm	420mm	420mm
Dimension of the appearance	205 × 150 × 55mm	165 × 160 × 55mm	127 × 146 × 62mm
Net Weight	0.9Kg	0.8Kg	/
Others	32 e-volume digital adjusting display	/	/

TH-0802/TH-0803/TH-0701
Discussion Video Voting Chairman Unit

TH-0802A/TH-0803A/TH-0701A
Discussion Video Voting Delegate Unit



● Features

TH-0802/TH-0803/TH-0701

- Latest digital design.
- With microphone, speaking button and indicator lamp that can show and control the state of speech.
- Single projection; With Anti-gas sonic boom and wind shield
- With president priority key; the system sound can be prompted to attract attendances' attention; can be set to terminate for permanent or suspend microphone status of all the speakers.
- The chairman unit can be placed in any position in loop.
- The chairman unit is unrestricted by the limiting function.
- With under-wound capacitive microphone pole and speak halo instructions.
- High sensitivity microphone.
- The power for the delegate units is supplied by the master controller at 24 safe voltage.
- T-shaped 8-core line for unit connection.
- Two groups of 3.5mm stereo sound output socket; can be used as record and earphone connection.
- Built-in hi-fi speaker; volume control (the speak automatically mute when the microphone be turned on).
- With voting,electing, discussing functions.
- With automatic video-tracking function.
- With a microphone unit connecting cable.
- In accordance with Enternational Electrical Equipment Certification standards (IEC 60914) and the International Safety Standard UL or CE certification.

● Specifications

Model	TH-0802/TH-0802A	TH-0803/TH-0803A	TH-0701/TH-0701A
Frequency Response	100-13KHz	40-16KHz	100Hz-18KHz
Sensitivity	-44dB ± 2dB	-42dB ± 2dB	-44dB ± 2dB
Reference sound-receiving distance	20-120cm	20-120cm	20-120cm
Tube length	420mm	400mm	400mm
Dimension of the appearance	205 × 150 × 55mm	245 × 145 × 55mm	245 × 150 × 65mm
Net Weight	0.9Kg	1Kg	1Kg
Others	32 e-volume digital adjusting display	Auto-Flip	With 160 × 32 LCD

TH-0802A/ TH-0803A/TH-0701A

- Latest digital design.
- With microphone, speaking button and indicator lamp that can show and control the state of speech.
- Single projection; With Anti-gas sonic boom and wind shield.
- With under-wound capacitive microphone pole and speak halo instructions.
- High sensitivity microphone.
- The system power supply for all the delegate unites is provided by the main frame at 24 safe voltage.
- T-shaped 8-core line for unit connection.
- Two groups of 3.5mm stereo sound output socket; can be used as record and earphone connection.
- Built-in hi-fi speaker; volume control (the speak automatically mute when the microphone be turned on).
- With voting,electing, discussing functions.
- With automatic video-tracking function.
- With a microphone unit connecting cable.
- In accordance with Enternational Electrical Equipment Certification standards (IEC 60914) and the International Safety Standard UL or CE certification.

TH-0806
Discussion Video Chairman Unit (Embedded Type)
TH-0806A
Discussion Video Delegate Unit (Embedded Type)



● Specifications

Model	TH-0806/TH-0806A
Frequency Response	100-13KHz
Sensitivity	-44dB ± 2dB
Reference sound-receiving distance	20-120cm
Tube length	390mm
Dimension of the appearance	230x110x70mm
Net Weight	0.7Kg

● Features

TH-0806

- Latest numerical control design; embedded installation; removable microphone pole
- with a speech button and an indicator lamp to show and control the state of the microphone
- Single projection; With Anti-gas sonic boom and wind shield.
- With president priority key to prompt the system and attract attendances' attention; can be set to terminate for permanent or suspend the status of all the Microphones
- the number of the Chairman Units is unrestricted and can be placed in any position in loop
- unrestricted by the limiting function.
- with under-wound capacitive microphone pole and speak halo instructions.
- the power for the units is supplied by the master controller at 24V.
- with T-shaped 8-core line for unit connection.
- Two groups of 3.5mm stereo sound output socket; can be used as record and earphone connection.
- Built-in high-fi speaker; volume control (the speaker automatically mute when the microphone is turned on.
- with vote / election / evaluation function, with automatic video tracking
- In accordance with International Electrical Equipment certification standards (IEC 60914) and the International Safety Standard UL or CE certification.

TH-0806A

- Latest numerical control design; embedded installation; removable microphone pole
- with a speech button and an indicator lamp to show and control the state of the microphone
- Single projection; With Anti-gas sonic boom and wind shield.
- with under-wound capacitive microphone pole and speak halo instructions.
- the power for the units is supplied by the master controller at 24V.
- with T-shaped 8-core line for unit connection.
- Two groups of 3.5mm stereo sound output socket; can be used as record and earphone connection.
- Built-in high-fi speaker; volume control (the speaker automatically mute when the microphone is turned on.
- with vote / election / evaluation function, with automatic video tracking
- In accordance with International Electrical Equipment certification standards (IEC 60914) and the International Safety Standard UL or CE certification.

TH-0807
Discussion Video Chairman Unit (desktop type)
TH-0807A
Discussion Video Delegate Unit (desktop type)



● Specifications

Model	TH-0807/TH-0807A
Frequency Response	100Hz-16KHz
Sensitivity	-44dB ± 2dB
Reference sound-receiving distance	20-80cm
Tube length	450mm
Dimension of the appearance	210x155x60mm
Net Weight	1.15Kg

● Features

TH-0807

- Latest numerical control design; Desktop moveable type
- with speech button and indicator lamp to show and control the state of the microphone
- Single projection; With Anti-gas sonic boom and wind shield.
- With president priority key to prompt the system and attract attendances' attention; can be set to terminate for permanent or suspend the status of all the Microphones
- with a removable under-wound capacitive microphone pole and speak aura
- The length of the gooseneck microphone is more than 45 cm with high sensitivity; The sound is clear and loud at the distance from the 5 - 30CM
- Super strong capacity of anti-disturbance of mobile phone
- the power for the units is supplied by the master controller at 24V.
- Two groups of 3.5mm stereo sound output socket; can be used as record or earphone or speaker.
- with vote / election / evaluation function, with automatic video tracking
- Built-in high-fi speaker; volume control (the speaker automatically mute when the microphone is turned on.
- In accordance to International Electrical Equipment certification standard (IEC 60914) and the International Safety Standard UL or CE certification.

TH-0807A

- Latest numerical control design; Desktop moveable type
- with speech button and indicator lamp to show and control the state of the microphone
- Single projection; With Anti-gas sonic boom and wind shield.
- with a removable under-wound capacitive microphone pole and speak aura
- The length of the gooseneck microphone is more than 45 cm with high sensitivity; The sound is clear and loud at the distance from the 5 - 30CM
- Super strong capacity of anti-disturbance of mobile phone
- the power for the units is supplied by the master controller at 24V.
- Two groups of 3.5mm stereo sound output socket; can be used as record or earphone or speaker.
- with vote / election / evaluation function, with automatic video tracking
- Built-in high-fi speaker; volume control (the speaker automatically mute when the microphone is turned on.
- In accordance to International Electrical Equipment certification standard (IEC 60914) and the International Safety Standard UL or CE certification.

TH-0808
Discussion Video Chairman Unit (cover type)

TH-0808A
Discussion Video Delegate Unit (cover type)



TH-0808

TH-0808A

● Specifications

Model	TH-0808/TH-0808A
Frequency Response	100Hz~16KHz
Sensitivity	-44dB ± 2dB
Reference sound-receiving distance	20-80cm
Tube length	450mm
Dimension of the appearance	275x150x45mm
Net Weight	1.07Kg

● Features

- TH-0808**
- Latest numerical control design; Desktop moveable type
 - with speech button and indicator lamp to show and control the state of the microphone
 - Single projection; With Anti-gas sonic boom and wind shield.
 - With president priority key to prompt the system and attract attendances' attention; can be set to terminate for permanent or suspend the status of all the Microphones
 - with a removable under-wound capacitive microphone pole and speak aura
 - The length of the gooseneck microphone is more than 45 cm with high sensitivity; The sound is clear and loud at the distance from the 5-30CM
 - Super strong capacity of anti-disturbance of mobile phone
 - the power for the units is supplied by the master controller at 24V.
 - Two groups of 3.5mm stereo sound output socket; can be used as record or earphone or speaker.
 - with vote / election / evaluation function, with automatic video tracking
 - Built-in high-fi speaker; volume control (the speaker automatically mute when the microphone is turned on.
 - In accordance to International Electrical Equipment certification standard (IEC 60914) and the International Safety Standard UL or CE certification.

- TH-0808A**
- Latest numerical control design; Desktop moveable type
 - with speech button and indicator lamp to show and control the state of the microphone
 - Single projection; With Anti-gas sonic boom and wind shield.
 - with a removable under-wound capacitive microphone pole and speak aura
 - The length of the gooseneck microphone is more than 45 cm with high sensitivity; The sound is clear and loud at the distance from the 5-30CM
 - Super strong capacity of anti-disturbance of mobile phone
 - the power for the units is supplied by the master controller at 24V.
 - Two groups of 3.5mm stereo sound output socket; can be used as record or earphone or speaker.
 - with vote / election / evaluation function, with automatic video tracking
 - Built-in high-fi speaker; volume control (the speaker automatically mute when the microphone is turned on.
 - In accordance to International Electrical Equipment certification standard (IEC 60914) and the International Safety Standard UL or CE certification.

Simultaneous Interpretation

TH-0700H
Infrared Transmitter Main Controller (4 CH,6 CH,8 CH,10 CH,12 CH optional)



● Features

- High degree of confidentiality, put an end to foreign interference and malicious eavesdropping.
- Apply to small, medium-to large-scale international conference room or outdoor venue.
- With automatic level control (ALC).
- Super strong anti-disturbance capacity, will not be interfered by lighting and wireless communications equipment.
- Can be easy and quick connected, reducing the project difficulty and also the project costs.
- Using the most advanced PLL technology.
- Exterior appearance designing ergonomic, and compact smoothly.
- With multiple groups of transliteration output channel which can be used for recording.
- With multiple groups of voice input channel, which can modulate and launch up to 12 kinds languages.
- With input level instruction capabilities which can directly show the size of the input level.
- Can be installed in the standard 19-inch rack.

TH-0700HS
Infrared Radiation Panel (4 CH,6 CH,8 CH,10 CH,12 CH optional)



● Features

- Super strong launch capability, the distance can up to 30 meters (25 W) and 20 meters (15 W).
- Multi-Channel launched by the same unit.
- With various transmitting power (15 W/25W) models which can be chosen to configure according to the venue area.
- Can be fixed installed (deploying universal stent) or using triangle stent installed.
- Half launch angle: ± 22° .

TH-0700HY
Double Translation Plate(4 CH,6 CH,8 CH,10 CH,12 CH optional)
TH-0700HD
Receiver Modules(4 CH,6 CH,8 CH,10 CH,12 CH optional)



TH-0700HY



TH-0700HD

● Features

- New digital designing.
- Using earmuffs headphones to monitor and speak.
- With individual volume control and automatic squeal function.
- Have the same access interlocking functions and ensure the channel can match the language one-to-one.
- With cough eliminating function, when the interpreter cough, it can prevent cough come out.
- When the speaker speaks too fast, you can press the button "slow" to asked for the speaker to slow down the speed.
- with indirect translation switch (REPLAY). When the translators can't understand the speakers meaning, he can monitor the transliteration of other translators to translate for the second time.
- Can be used with the connection of the infra-red language distribution system.
- Two translators can take turns to use the same translation unit.
- Can be carried out the function of simultaneous interpretation in 12 languages. (Including the soundtrack channel).

● Features

- Exterior appearance designing ergonomic, and compact smoothly.
- Lightweight receiver coordinate with the using of headphones which allows the users to feel relax and comfortable.
- The aural reception of each signal paths mutual non-disturbance, providing 12 channels Language to select (rolling cycle).
- LCD display (with channel selection instructions, signal intensity instructions, power instructions)
- With electronic volume switches, free to adjust the size (28 grade).
- With compress function (little noise, no distortion, wide dynamic range).
- Configurate charge box, receiving unit has the rechargeable function.
- Receiving unit using the power rechargeable battery, can work for up to 30 hours.
- The data setted up by the receiving unit can be stored when the power is down.
- Within the effective range of the infrared emission, it will be unrestrict to increase the number of the receiving unit.
- Walk freely without the meeting seats restriction ,only if within the scope of signal transmission.
- The battery cover of the receiving unit can be locked.
- Receiving unit charge with direction.

TH-0700HC Charge Box



● Features

- Size: 62 × 39 × 32 cm. Handle height: 39 cm
- Can charge 24 receiving units simultaneously.
- Charge at the flashing red light, green light after full power.
- Charging time for 2-3 hours. Supply voltage: AC 110V/220V/50Hz.
- With retractable tension bar and convenient mobile pulley.

TH-9000M
Video Camera Auto-track Central Processor



Features

- Designed by the latest digital technology, working with the meeting host, delegate unit and software.
- Support many cameras. (Build-in 4 cameras, it can expand to 8)
- 256 video camera auto-track control points.
- Support many kinds of cameras agreement.
- The central processor can communicate with the equipments by RS232 jack, such as computer or video switching matrixes.
- Support many kinds of meeting mode: Freely discussion mode, FIFO mode and Speech-limit mode.
- Build-in video switching matrixes(4 input, 1 output).
- AC220V.

TH-0791
High Speed Preset Sphere Head Vidicon(Flushmount)



Features

TH-0791

- 1/4" SONY SUPER HAD CCD
- 18 times optical zoom, f=4.1mm(wide)-73.8mm(tele),F=1.4-F3.0
- 480TVL
- High strength double glazed aluminium lunerite bottom canopy, high temperature resistance and resistant to corrosion
- 360° continuous rotation, the max speed 300° /s
- 4 roads alarm input and one road alarm output
- 6 roads programmable tour check, 128 pre-points, with self-learning function
- OSD display English menu, pre-point title and camera address, etc. displayable
- Integrated multi protocols, baud rate optional, multi-cameras self-adaptation and standard RS-485 control
- Packed ports, with hot plug function, convenient for aloft working
- Zone hidden selection function (max 8 programmable hidden zones)
- Built in 3KV lightning protection, surge protection and instant over voltage protection
- Adopt all-weather shield, built in automatic thermostatic apparatus
- Adopt AC24V power and line lock available
- About forty four hundred thousand pixel, 12 times digital zoom
- Lowest illumination: 1.0LX(standard) (F1.4,50IRE)

Specifications

Model	TH-0791
Horizontal Turning	0° ~ 300° /s
Vertical Rotation	0° ~ 120° /s
Level Angle	360° Infinite place
Vertically Angle	90° (180° automatic rolling-over)
Pre-points	128 Pieces (max)
Control method multi protocol	RS485
Relative Humidity	90%
Working Temperature	0° C~50° C
Power	AC 24V
Power Consumption	20VA
Weight	2Kg

TH-0792
High Speed Preset Sphere Head Vidicon(Wall Mount)



Features

TH-0792

- 1/4" SONY SUPER HAD CCD
- 18 times optical zoom, f=4.1mm(wide)-73.8mm(tele),F=1.4-F3.0
- 480TVL
- High strength double glazed aluminium lunerite bottom canopy, high temperature resistance and resistant to corrosion
- 360° continuous rotation, the max speed 300° /s
- 4 roads alarm input and one road alarm output
- 6 roads programmable tour check, 128 pre-points, with self-learning function
- OSD display English menu, pre-point title and camera address, etc. displayable
- Integrated multi protocols, baud rate optional, multi-cameras self-adaptation and standard RS-485 control
- Packed ports, with hot plug function, convenient for aloft working
- Zone hidden selection function (max 8 programmable hidden zones)
- Built in 3KV lightning protection, surge protection and instant over voltage protection
- Adopt all-weather shield, built in automatic thermostatic apparatus
- Adopt AC24V power and line lock available
- About forty four hundred thousand pixel, 12 times digital zoom
- Lowest illumination: 1.0LX(standard) (F1.4,50IRE)

Specifications

Model	TH-0792
Upper canopy material	Aluminium alloy
Wire balloon material	Imported acrylic optical material
Horizontal Turning	0° ~ 300° /s
Vertical Rotation	0° ~ 120° /s
Level Angle	360° Infinite place
Vertically Angle	90°
Pre-points	128 Pieces (max)
Control method multi protocol	RS485
Power	AC24V
Power Consumption	35VA
Relative Humidity	90%
Weight	4Kg

TH-9000S Frequency Shifter



Features

- TH-9000S is a digital system whistle proof device special for conference, lecture, teaching and stage. It is effective to control whistle, amplifier volume and guarantee voice transmission quality, High fidelity and clear voice. It can restrain the returning whistle maximally, and prevent burnout of the acoustics devices and speakers effectively.

Specifications

- Power supply: AC220/50Hz
- Microphone balanced input
- Circuitry/Balanced input
- Circuitry/Balanced output
- Frequency shift switch
- Frequency: 5Hz ± 1 Hz
- Circuitry input impedance: ≥5K Ω
- Circuitry output impedance: ≤600 Ω
- Spreading Gain: 6 ~ 10dB
- Frequency response: 20Hz-20KHz in frequency non-shift state 150Hz-15KHz in frequency shift state

The following accessories just apply to TH series products - - - - -

TH-13 Main Cable (13m 8-pin)



TH-15T T-Extension Line



TH-2 Return Road (8-pin dual-male)



TH-0734 Headset Earphone



TH-0732 Headphones



TH-0735 Dongle



TH-0733 IC Card



TH-8DH 8-core floor-insert box

- Adpot copper alloy
- Antirust
- Artistic and practical
- one input and three outputs