

Public Address System

PATECH


Mixer Amplifier - 6 Series

QSM-606EZ

QSM-612EZ

QSM-624EZ

Option :
+Chime

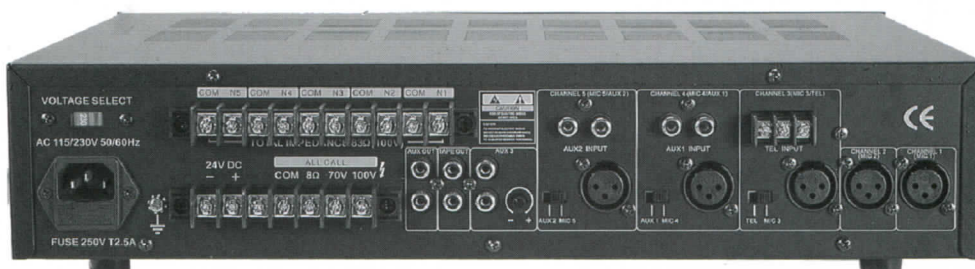

MODEL	QSM-606EZ	QSM-612EZ	QSM-624EZ
POWER SUPPLY		AC 115/230V 50/60Hz , DC 24V	
POWER OUTPUT	60W RMS	120W RMS	240W RMS
TOTAL HARMONIC DISTORTION		<= 1 % @ 1 KHz	
SENSITIVITY		XLR (BALANCED) CHANNEL 1~3 (MIC 1~3) 1 mV @ 600Ω TEL (TERMINAL) 100 mV @ 600Ω CHANNEL 4 (MIC 4) 0.5 mV @ 600Ω AUX 1(RCA), 100mV @ 22KΩ CHANNEL 5 (MIC 5) 100mV @600Ω AUX 2(RCA), 100mV @22KΩ AUX 3(RCA), 100mV@22KΩ TAPE OUT (RCA) ,AUX OUT(RCA) 1V	
FREQUENCY RESPONSE		50 Hz ~ 20K Hz +/-3dB	
OUTPUT		100 V , 70 V , 8Ω	
SIGNAL TO NOISE RATIO		86 dB	
CHIME INPUT		MIC 5	
VOICE PRIORITY MUTE		MIC 1	
PHANTOM POWER ADJUSTABLE		MIC 1~5	
TONE		BASS 100Hz ± 10dB TREBLE 10KHz ± 10dB	
AC POWER CONSUMPTION	160 W @ RATED POWER	320 W @ RATED POWER	640 W @ RATED POWER
DC POWER CONSUMPTION	4A @ RATED POWER	8 A @ RATED POWER	15 A @ RATED POWER
DIMENSION		88mm(H)X425mm(W)X305mm(D)	
WEIGHT	8.2 KGS	9.5 KGS	10.6 KGS
MOUNTING		FREE STANDING OR 19" RACK	