



SVS-62W

WALL-MOUNT INSTALLATION SPEAKER



SVS-62WB



SVS-62WW

SVS-62 is a new wall-mount two-way passive indoor installation loudspeaker 8 Ohm 70V/100V ideal for applications requiring high-quality sound. designed for a wide range of commercial audio applications including retail shops, hotels, shopping malls, restaurants, conference – rooms, bars and health clubs.

- Passive Two-Way Full-range Loudspeaker.
- Elegant design.
- High-quality sound.
- Indoor and outdoor applications.
- High sensitivity.
- Transformer Taps 70V, 100V
- 6.5-inch LF transducer 60Watts RMS
- 1-inch HF transducer 20Watts RMS
- Power Handling 160Watts
- Coverage H 100° x V 60°

SPECIFICATIONS

MODELS

SVS-62WB | SVS-62WW

Speaker Type	Full-range, Low-High, Two-Way
Transformer Taps	70V : 40W, 20W, 10W, 5W 100V : 80W, 40W, 20W, 10W 8Ω Bypass
Frequency Response	70Hz ~ 20KHz (-3dB) 65Hz ~ 20KHz (-10dB)
Sensitivity 1 W/1 m	88dB
Max. SPL/1m (calc)	118dB
Coverage (Nominal -6 dB) H	100°(±5°)
Coverage (Nominal -6 dB) V	60° (±5°)
System Power Handling	80W/160W(Max)
Driver LF Transducer	6.5 inch Glass Fiber Woven Cone Rubber Edge
Driver HF Transducer	1 inch Neodymium Soft Dome
Nominal Impedance (Passive)	8Ω
Input Connections	Euroblock / screw terminal
Color	Black / White
Indoor / Outdoor	Indoor
Material	Engineering-Plastic (ABS)
Dimensions (H x W x D mm)	196 x 200 x 330mm (without bracket)
Weight	10 Kg/pair, 5 Kg/Single

Certifications : CE


Specifications are subject to change without prior notification.



SVS-62W

WALL-MOUNT INSTALLATION SPEAKER

EXAMPLE CONNECTION DIAGRAM

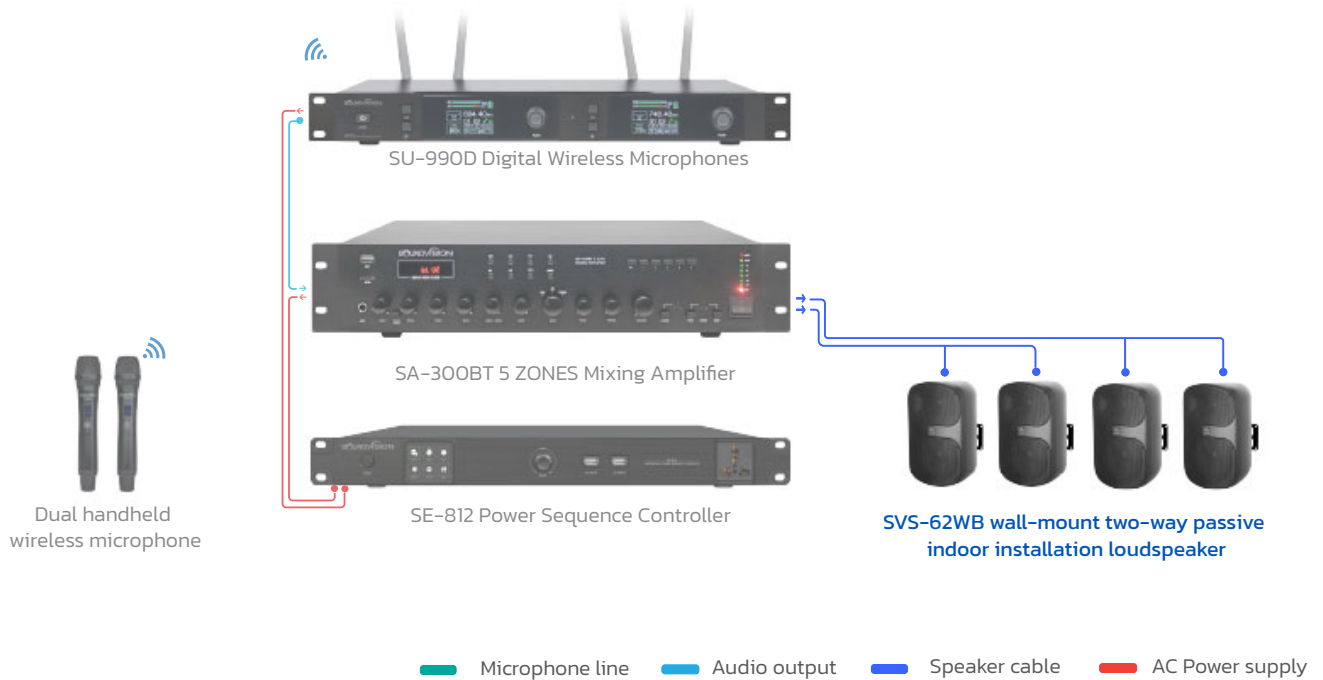

SVS Series supports applications multiple

Meeting Room, Conference Room, Training Rooms,
Hotels, Health clubs, Retail shops, Shopping malls &
Plaza, Restaurant & Bar.

