


DESCRIPTION

The slim array speaker form a linear sound source with the internal speaker unit arrayed vertically in close proximity.

SPECIFICATIONS

Enclosure		Bass reflex type
Max. Input Power (Low Imp.)		120W (continuous pink noise)
Rated Input (High Imp.)		60W
Rated Impedance		Low Impedance : 8Ω 100V Line : 167 Ω (60W), 330Ω (30W), 500Ω (20W), 1 kΩ (10W) : selectable
Sensitivity		95 dB (1W, 1m)
Frequency Response		180 – 15,000Hz
Speaker Component		8cm(3”) cone-type x 9
Connection		Push-in terminals
Operating Temperature		–10°C to 50°C (14° F to 122° F)
Directivity Angle		Horizontal: 90° / Vertical: 0°
Impedance change		Rotary Switch (Selectable)
Finish	Enclosure	MDF, Wet paint, White
	Punched net	SECC, Wet paint, White
	Wall bracket	SECC, Wet paint, White
	Side Panel	SECC, Wet paint, White
	Metal Cover	SECC, Wet paint, White
Dimensions		100 (W) × 883 (H) × 130 (D) mm
Weight		8.2 kg unit only
Accessory		Speaker bracket ∙1 Pc, Joint bracket ∙1 Pc, Wall bracket ∙1 Pc, Fixing Bolt M5X60 ∙1 Pc, Hexagon bolt M6 X 12 (With plain washer and spring washer) ∙2 Pcs, Machine screw M5 X 15 (With plain washer and spring washer) ∙4 Pcs,
Optional		HY-S60W AS : Side Stack Bracket ∙2 Pcs, Rear Stack Bracket ∙1 Pc

APPEARANCE

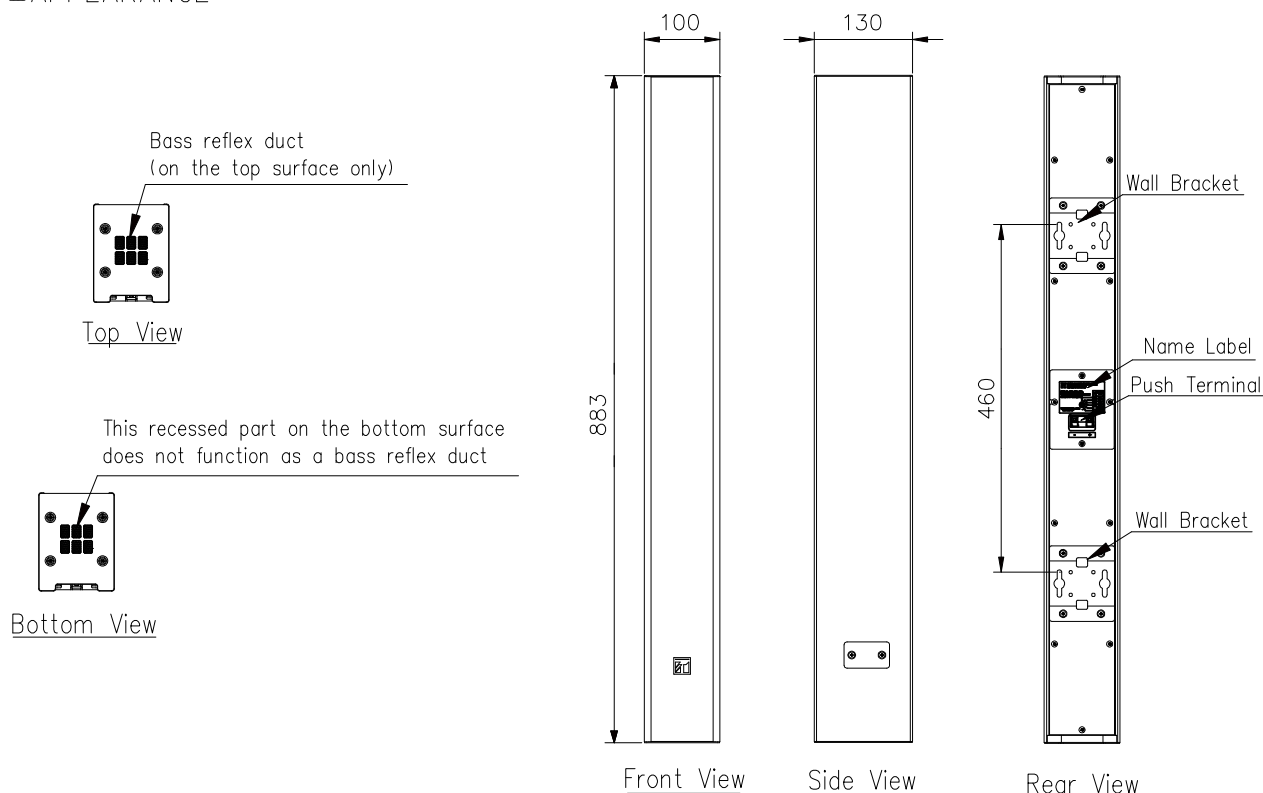

UNIT:mm SCALE:1/10